


C+M[®]

HEAVY DUTY VERTICAL BALING PRESSES

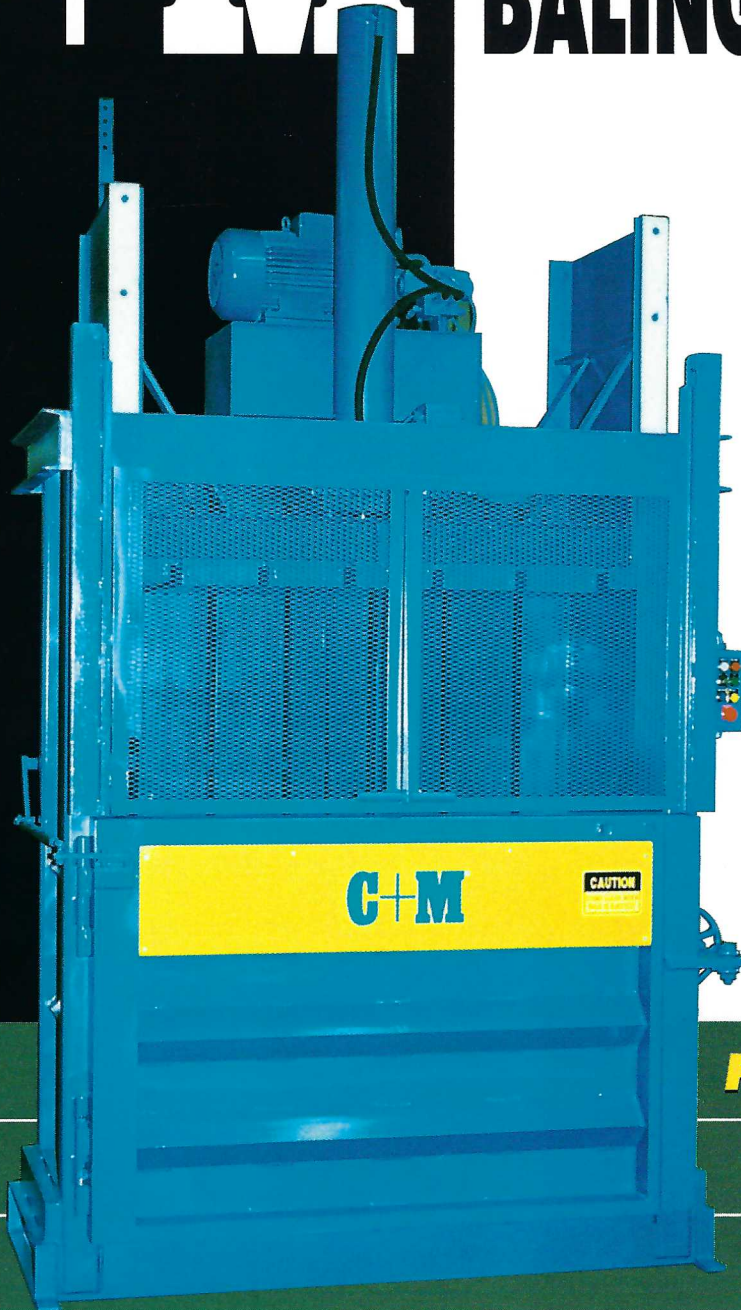

***Designed and Manufactured
Heavier and Stronger
for Extended Usable Life
Over Other Brands
of Vertical Balers***

HD ECONOMY MODELS

HD DELUXE MODELS

30", 40", 48", 60", 72" Sizes

Distribution Centers • Industrial Plants • Textile Mills • Retail Stores

Supermarkets • Recycling Centers • Manufacturers • Used Clothing Centers

C+M VERTICAL DOWNSTROKE BALERS (Custom Models Available)

Baler Model		*40HDE	*48HDE	*60HDE	60HDD	60HD-NF	*72HDE	72XHDE
Chamber	Width	40"	48"	60"	60"	60"	72"	72"
	Depth	20"	30"	30"	30"	30"	30"	42"
	Height	30"	42"	42"	42"	48"	42"	48"
Bale Size	Width	40"	48"	60"	60"	60"	72"	72"
	Depth	20"	30"	30"	30"	30"	30"	42"
	Height	22"-30"	22"-48"	22"-48"	22"-48"	29"-48"	22"-48"	48"
Feed Opening	Width	40"	48"	60"	60"	60"	72"	72"
	Height	18"	26"	26"	26"	23"	26"	24"
Weight		4,000 lbs	4,700 lbs	5,100 lbs	5,500 lbs	12,600 lbs	6,100 lbs	13,000 lbs
Pressure		2500 psi	2500psi	2500 psi	2500 psi	2500 psi	2500 psi	2500 psi
Cylinder	Bore	6"	6"	6"	6"	8"	6"	7"
	Stroke	48"	48"	48"	48"	52"	48"	52"
Reservoir		20 gal	20 gal	20 gal	20 gal	90 gal	20 gal	40 gal
Cycle Time		52 sec	52 sec	52 sec	52 sec	30 sec	52 sec	52 sec
Total Force		70,650 lbs	70,650 lbs	70,650 lbs	70,650 lbs	125,600 lbs	70,650 lbs	96,200 lbs
Platen Force		88.3 psi	49.1 psi	39.3 psi	39.3 psi	69.8 psi	32.7 psi	33 psi
Motor		10 hp TEFC	10 hp TEFC	10 hp TEFC	10 hp TEFC	20 hp TEFC	10 hp TEFC	20 hp TEFC
Voltage		208/230/460	208/230/460	208/230/460	208/230/460	208/230/460	208/230/460	208/230/460
		3 Phase	3 Phase	3 Phase	3 Phase	3 Phase	3 Phase	3 Phase
Retainer Dogs		Fixed	Fixed	Fixed	Fixed/Spring Loaded	Fixed	Fixed	Fixed
Wire Feed		Manual	Manual	Manual	Manual/Wire Returns	Manual/Wire Returns	Manual	Manual
Eject System		Trans-Chain	Trans-Chain	Trans-Chain	Auto-Lock	Trans-Chain	Trans-Chain	Trans-Chain
Electrical Control		Hard-Wired	Hard-Wired	Hard-Wired	PLC	Hard-Wired	Hard-Wired	Hard-Wired

Options Available

- Bale Eject Table for Receiving Bale and Easy Fork Lift Removal
- Rear Feed Chute (for Conveyor or Hand Feed)
- Photoelectric Eye System w/Controller
- Increase in Depth of Baler from 20" to 30" or 30" to 42"
- Hydraulic Ejection (Push Type) System with 4"x30" Cylinder
- Hydraulic Ejection (Push Type) System with 5"x36" Cylinder
- Hydraulic Ejection (Push Type) System with 6"x48" Cylinder (for 42" Depth)
- Hold Down Timer
- Hydraulic Oil Heater
- Hydraulic Tank Cover

Deluxe Model Features

- Auto-Lock Bale Eject System
- Programmable Logic Controller
- Disconnect
- PLC Timer
- Wire Return Chute System (Optional)
- Spring Loaded Retainer Dogs (Optional)
- Add approximately 400 lbs. to Weight

*Also Available in Deluxe Models

- Baling Wire Available



C&M BALING SYSTEMS, INC.

P.O. Box 16309 • Winston-Salem, NC 27115

Tel: 336-723-1838

Toll Free: 800-225-3796

E-mail: sales@baling.com

The C+M products that are described, pictured or listed in this brochure are for illustration use only. Actual use and application of these products should be in accordance with applicable codes and regulations. They must be arranged to insure the safety of employees including the use of protective guards and covers where necessary. Equipment enhancements and improvements are continually being developed by C+M engineers. Changes in specifications, designs and/or ratings may occur without notice. All products subject to C+M warranty policy in use at the time of purchase.